

# ML-C 2600

Compact entry machine

Low space requirements and full-line compatibility

Flexible and rigid films

Films up to 422 mm of width, repeat length up to 300 mm



# ML-C 2600

With a total size of just 3.7 m, the ML-C 2600 marks the compact entry into thermoforming and fits into nearly any place of use. This thermoformer is ideally suited for small or medium production and allows operation from both sides of the machine. Should preheating be applied, the loading zone is not reduced, optional pluggable forming inserts allow a product change-over within minutes. Depending on specification, the ML-C 2600 can process rigid films up to 600  $\mu\text{m}$  with a width of up to 422 mm in height repeat lengths up to 300 mm.

**Standards:** Sealing Technology, WEBOMATIC CleanDesign®, PLC control unit, WEBOMATIC Servo-Drive Technology


**Packaging types:**  
Sealing, vacuum, MAP, skin, shrink

**Machine dimensions:**  
3.740 x 1.070 x 1.820 mm  
(L x W x H)

**Control unit:**  
Mitsubishi PLC, touch screen 8,4"

**Repeat length/Index:**  
120 – 300 mm  
(also with pre-heating)

**Draw depth:**  
10 – 130 mm

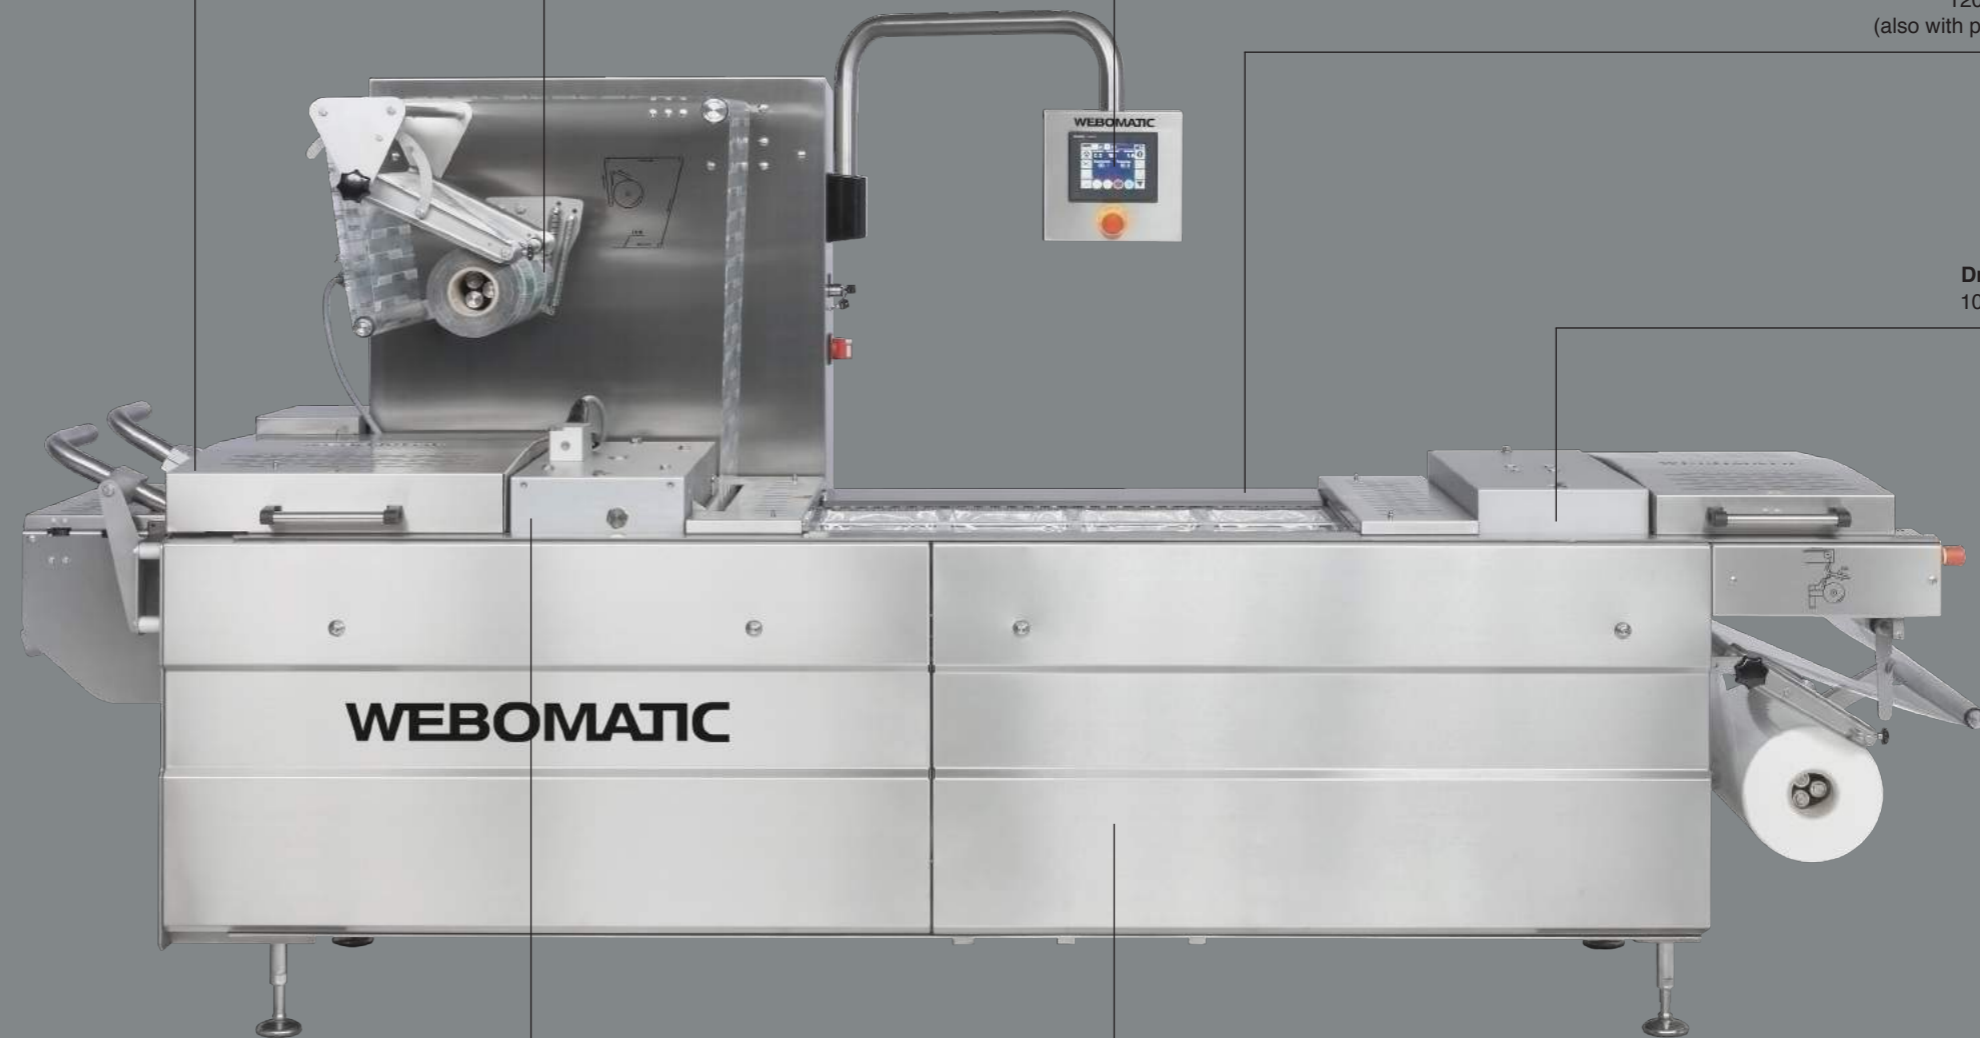

**Packaging output:**  
up to 18 cycles/min  
(depending on product and application)

**Vacuum pumps, for 50 Hz:**  
internal 140 m<sup>3</sup>/h, external depending on application (other capacities, voltages and frequencies upon request)

